

Stainless Steel T-Handles

AISI 316

SPECIFICATION

Stainless steel

- AISI 316
- Matte shot-blasted finish **MT**
- Polished finish **PL**

INFORMATION


Stainless steel T-handles GN 5063 are great for lifting, moving and operating parts or for clamping purposes by means of threads. The ergonomic shape allows for high operating forces.

The T-handles can also be used in particularly aggressive environments thanks to the materials used



TECHNICAL INFORMATION

- ISO-Fundamental Tolerances (see page A21)
- Stainless Steel Characteristics (see page A26)

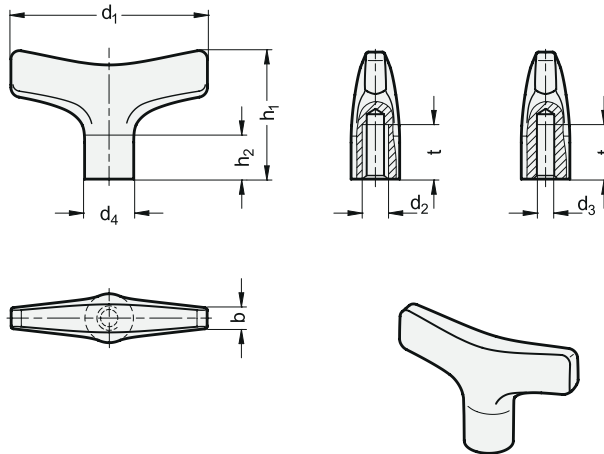

* Complete with surface index of the T-Handles (MT or PL)

MT Matte shot-blasted finish
PL Polished finish

GN 5063

STAINLESS STEEL

Description	d ₁	d ₂ Thread	d ₃ H9 Bore	b	d ₄	h ₁	h ₂ ≈	t min.	⚖
GN 5063-63-M6-*	63	M 6	-	7	16	41	12	12	111
GN 5063-63-B6-*	63	-	B 6	7	16	41	12	12	110
GN 5063-63-M8-*	63	M 8	-	7	16	41	12	16	108
GN 5063-63-B8-*	63	-	B 8	7	16	41	12	16	106
GN 5063-80-M8-*	80	M 8	-	9	21	52	15	16	225
GN 5063-80-B8-*	80	-	B 8	9	21	52	15	16	223
GN 5063-80-M10-*	80	M 10	-	9	21	52	15	20	220
GN 5063-80-B10-*	80	-	B 10	9	21	52	15	20	216
GN 5063-100-M10-*	100	M 10	-	11	25	65	19	20	432
GN 5063-100-B10-*	100	-	B 10	11	25	65	19	20	429
GN 5063-100-M12-*	100	M 12	-	11	25	65	19	24	425
GN 5063-100-B12-*	100	-	B 12	11	25	65	19	24	419

Weight type MT